


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELITEL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20120822-11	ORIGINAL RELEASE		

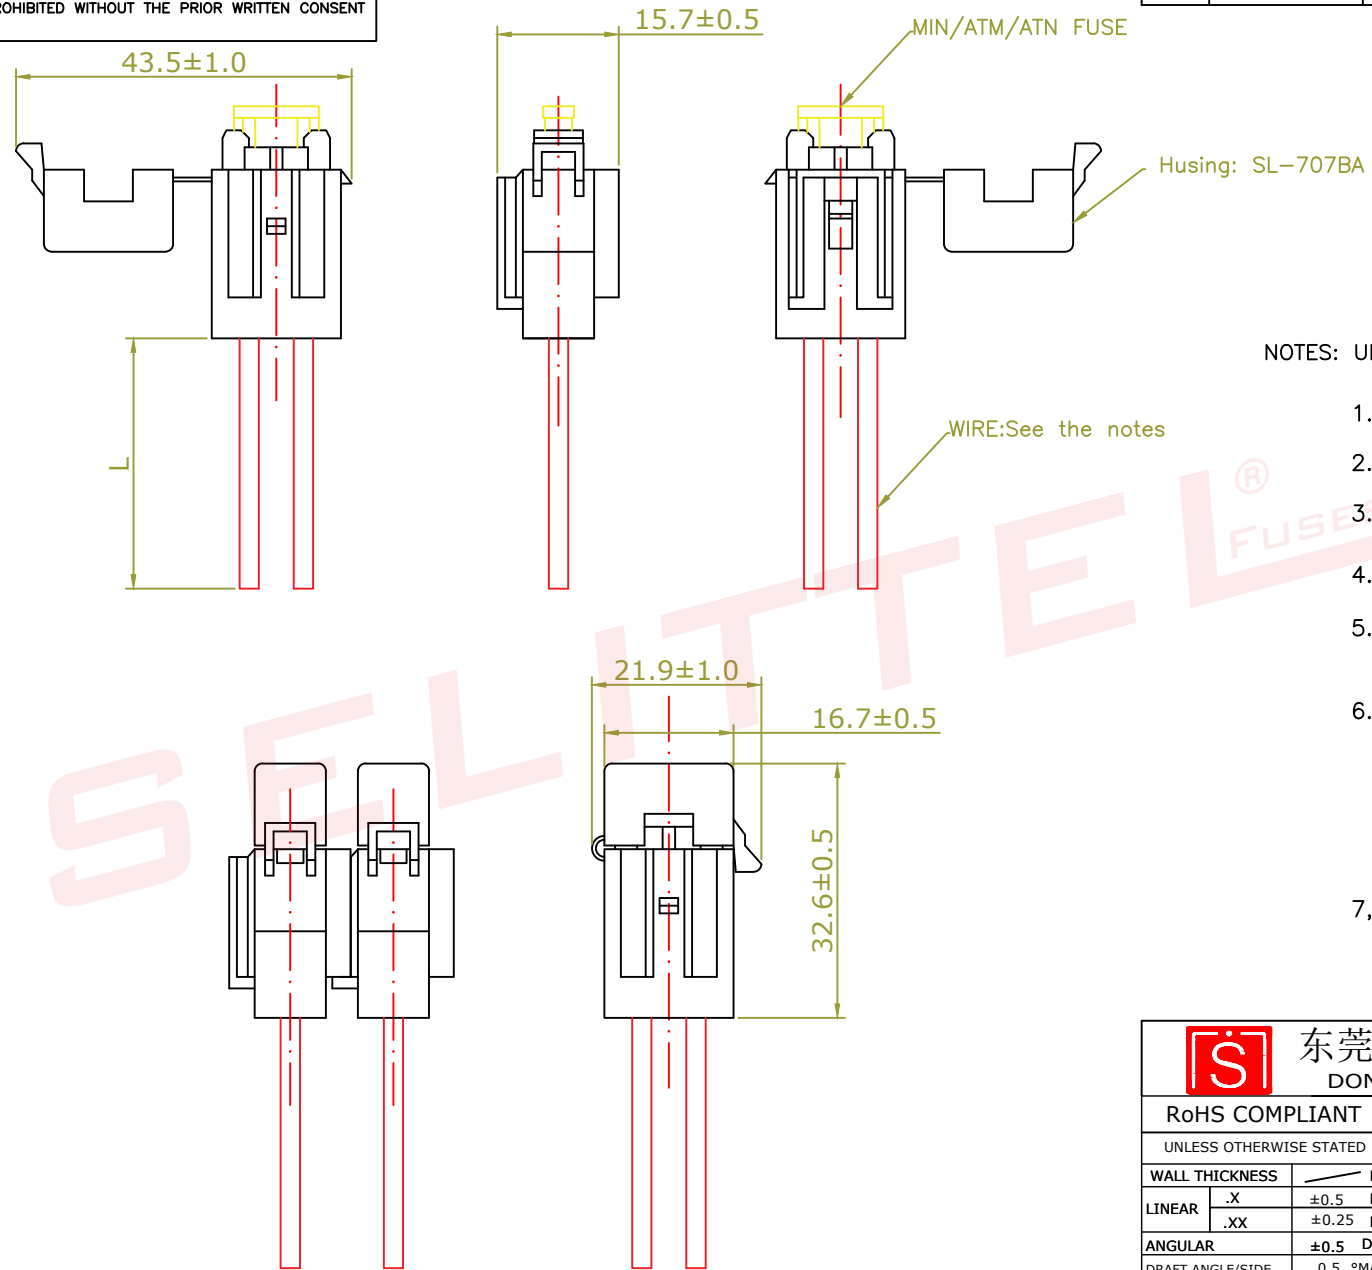

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MIN/ATM/ATN
2. Electrical: Rated for current up to 30A.
3. Insulating body: SL-707BA, PA, Nature;
4. Contact: SL-707BC, Brass with Tin plated.
5. With other wire sizes or leangths available on special order. Standard L=100MM, Red;
6. Range of wire gauge:
 - A: UL1015 20AWG for 5A ;
 - B: UL1015 18AWG for 10A ;
 - C: UL1015 16AWG for 15A ;
 - D: UL1015 14AWG for 20A ;
7. Features interconnecting pins on side of fusebolck for secure multiple block configurations.



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			Inline Fuseholder				Customer	
UNLESS OTHERWISE STATED								
WALL THICKNESS		 MM	For MIN Blade fuse					
LINEAR	.X	±0.5 MM						
	.XX	±0.25 MM						
ANGULAR		±0.5 DEG	DSGN	JACK	07-12-12	SCALE	free	
DRAFT ANGLE/SIDE		0.5 °MAX	DFTS	JACK	07-12-12	SHEET	1 OF 1	
BURR & FLASH		0.10 MAX	CHKD			PART NO.		REV
BREAK CORNERS		0.20 R.MAX						
PARTING LINE MISMATCH		0.05 MAX	APPD			SL-707B		A