
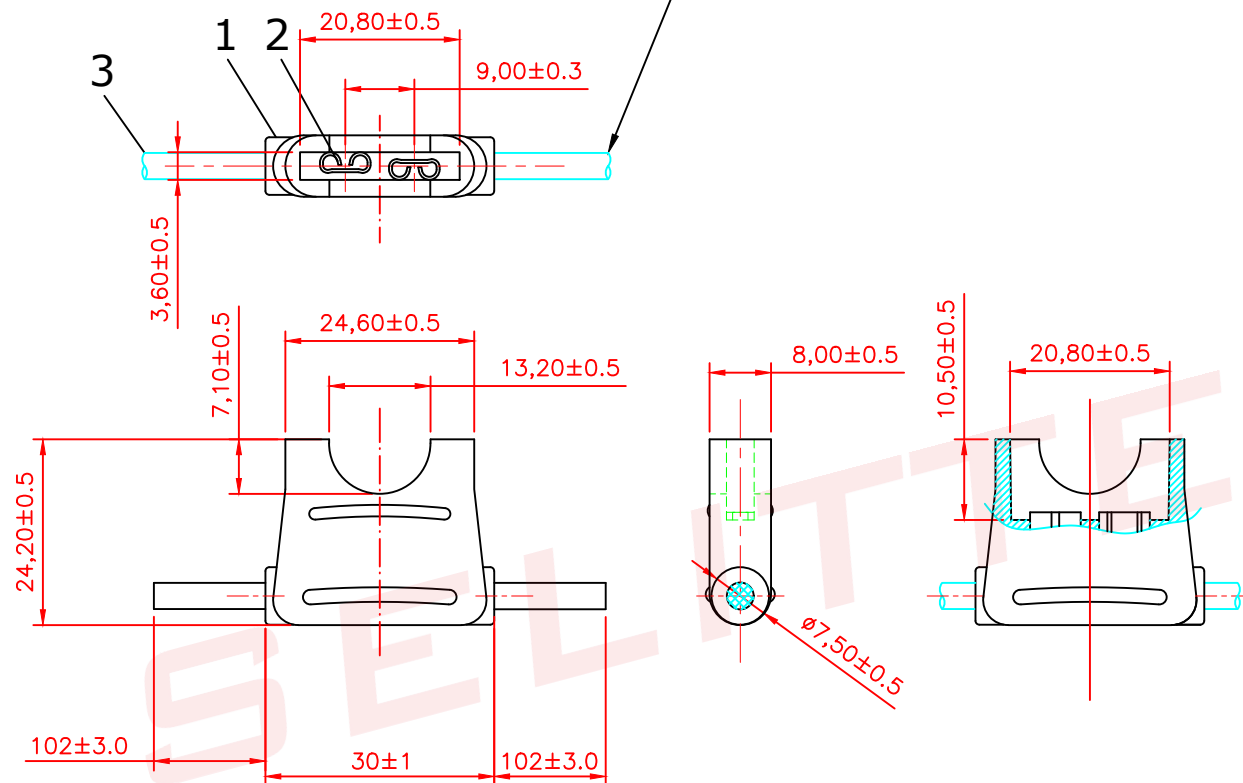


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-03	ORIGINAL RELEASE		
B	2011081001	Change the wire lenght		

Wire Color:1015 20AWG Red

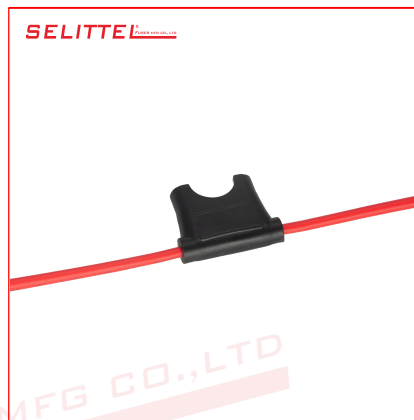

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATO—N Fuse.
2. Electrical: Rated for current up to 30A32V.
3. Insulating body: PVC.
4. Contact: Brass with Tin plated.
5. With other wire sizes or leangths available on special order.
6. Range of wire gauge #14—#18.

东莞市赛力特保险丝制造有限公司

RoHS COMPLIANT

UNLESS OTHERWISE STATED

FUSEHOLDER

FOR ATO—N

2	W-ATO-N	Wire	2	UL1015 20AWG	Red
2	TC-ATO-N	TERMINAL CONTACT	1	Brass	
1	FH-ATO-N	Body	1	PVC	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

WALL THICKNESS			FOR ATO—N						
LINEAR	.XX	±0.15	MM	DSGN	Tommy Qiu	07-12-08	SCALE	free	
	.XXX	±0.05	MM						
ANGULAR		±0.5	DEG	DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX							
BURR & FLASH		0.10	MAX	CHKD			PART NO.		REV
BREAK CORNERS		0.20	R.MAX				SL-708C-230-20		B
PARTING LINE MISMATCH		0.05	MAX	APPD					