
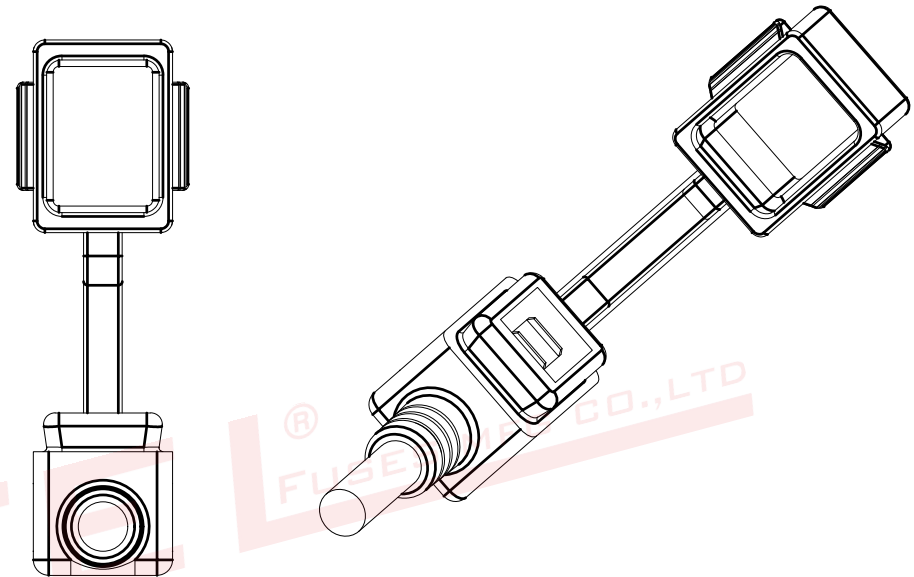


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	2022061021	ORIGINAL RELEASE		

Wire Color: 1015 10AWG Red

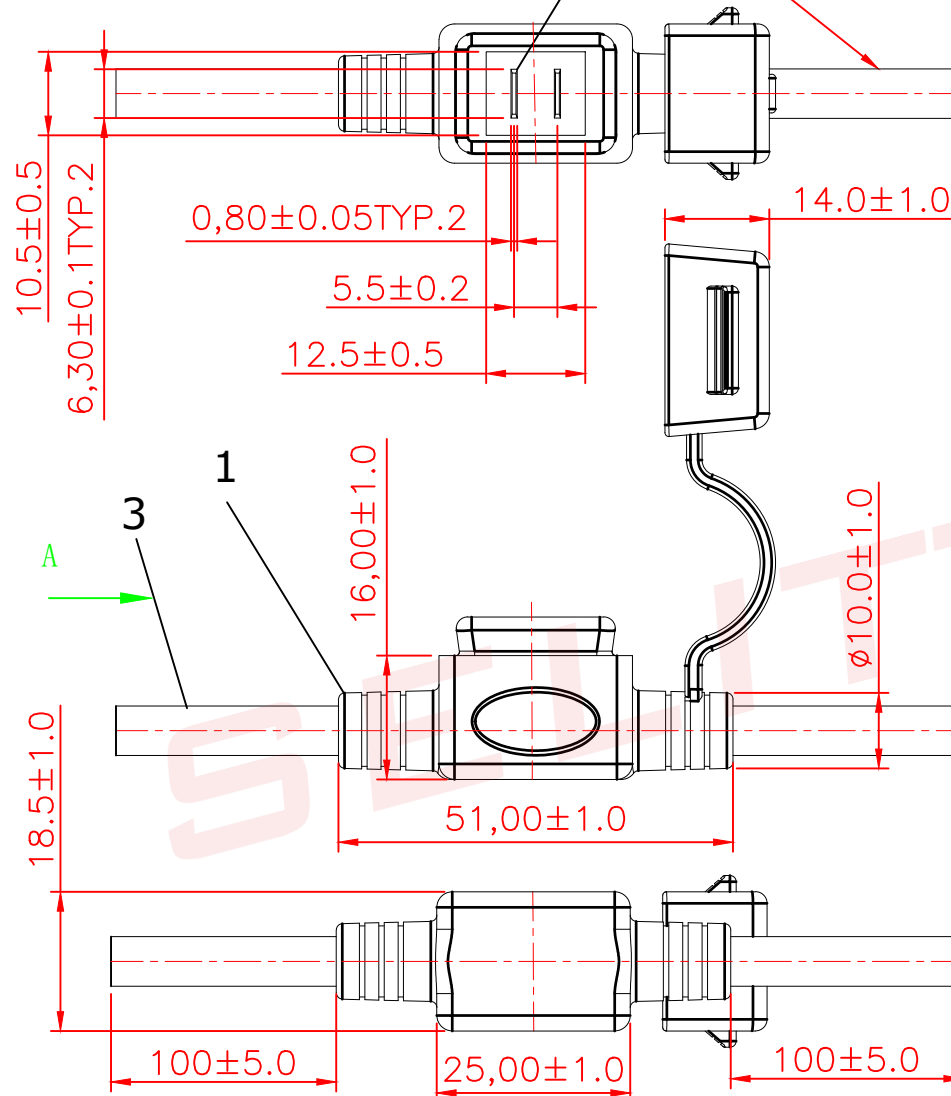

Section A

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For SBFC-LPJ/Low Profile JCASE Fuse.
2. Electrical: Rated for current up to 60A58VDC.
3. Insulating body: PVC.
4. Contact: Brass with Tin plated.
5. With other wire sizes or leangths available on special order.
6. Range of wire gauge 8AWG-12AWG.
7. Extraction Force: 9N Min.



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		FUSEHOLDER		Customer	
UNLESS OTHERWISE STATED		FOR LPJ Fuse			
WALL THICKNESS	MM	DSGN	TY	06-01-22	SCALE
LINEAR	.XX ±0.15 MM	TY	Tommy Qiu	06-10-22	free
ANGULAR	.XXX ±0.05 MM	DFTS	CHKD	SHEET	1 OF 1
DRAFT ANGLE/SIDE	0.5 °MAX	CHKD	APPD	PART NO.	REV
BURR & FLASH	0.10 MAX	SL-709A-300-10		A	
BREAK CORNERS	0.20 R.MAX				
PARTING LINE MISMATCH	0.05 MAX				

2	W-LPJ-N	Wire	2	1015 10AWG	Red
2	TC-LPJ-N	TERMINAL CONTACT	1	Brass	Tin Plated
1	FH-LPJ-N	Body	1	PVC	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS