


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER


DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-04	ORIGINAL RELEASE		

Wire Color: 1015 10AWG Red

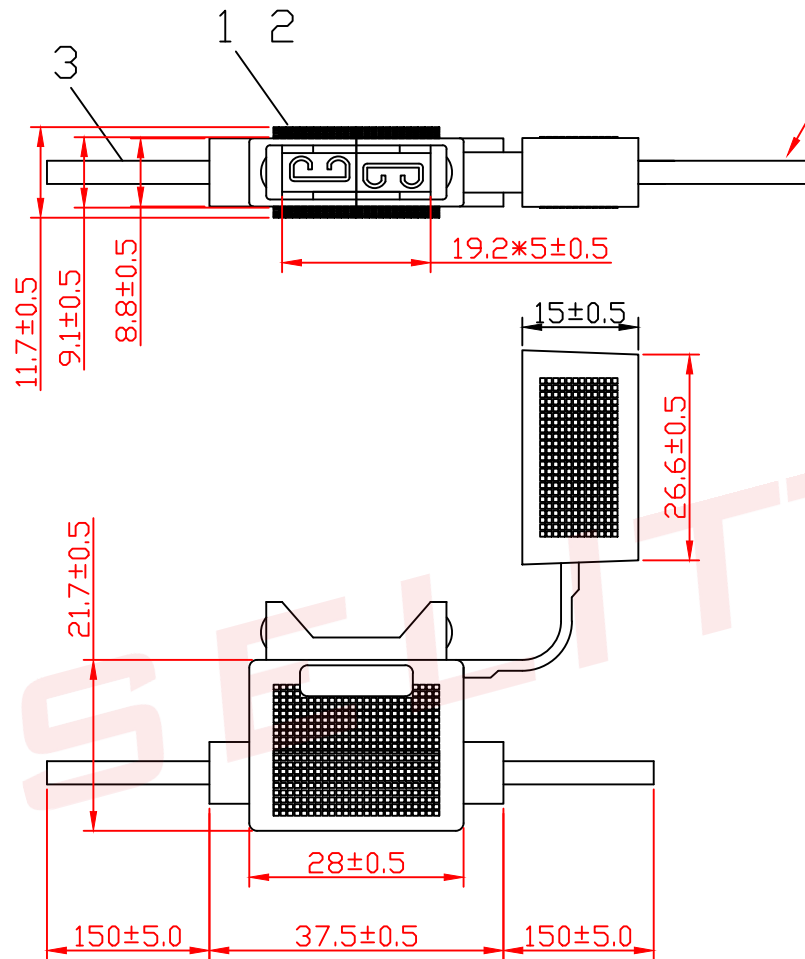

SELITTEL

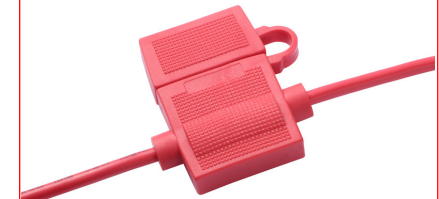

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATO-NFuse.
2. Electrical: Rated for current up to 30A.
3. Insulating body: PVC.
4. Contact: Brass with Tin plated.
5. With other wire sizes or leangths available on special order.
6. Range of wire gauge #10-#22.



东莞市赛力特保险丝制造有限公司

DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		FUSEHOLDER		Customer	
UNLESS OTHERWISE STATED		FOR MIN-N or ATM-N			
WALL THICKNESS	MM	DSGN	Tommy Qiu	07-12-08	SCALE free
LINEAR .XX	±0.15 MM	DFTS	Tommy Qiu	07-12-08	SHEET 1 OF 1
ANGULAR .XXX	±0.05 MM	CHKD			PART NO.
DRAFT ANGLE/SIDE	0.5 °MAX	APPD			REV
BURR & FLASH	0.10 MAX				
BREAK CORNERS	0.20 R.MAX				
PARTING LINE MISMATCH	0.05 MAX				

3	W-MIN-N	Wire	2	1015 10AWG	Red
2	TC-MIN-N	TERMINAL CONTACT	1	Brass	Tin Plated
1	FH-MIN-N	Body	1	PVC	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS