



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-01	ORIGINAL RELEASE		
B	2017120121	Add the notes		

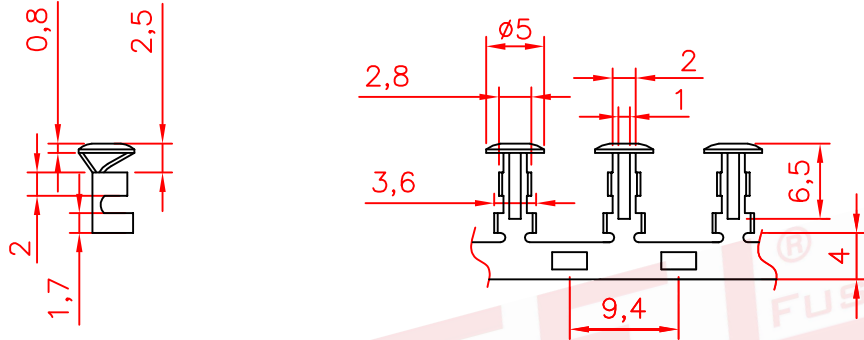


NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL: BRASS T=0.3MM.
2. finish: -2 Tin plated;  
-1 Ni plated;  
-0 Nature
3. removed burrs and sharp edge.
4. TOLERANCE:  $\pm 0.1$
5. APPLY FOR 5.2X20MM INLINE FUSEHOLDER.
6. RATING CURRENT: 10A.
6. wire range: 18AWG-22AWG.
7. Qty/Reel: 4000PCS.



东莞市赛力特保险丝制造有限公司  
SELITTEL Fuse MFG. Co., LTD

ROHS COMPLIANT		SMALL EAR CLIP			
UNLESS OTHERWISE STATED		FOR INLINE FUSEHOLDER			
WALL THICKNESS					
LINEAR	.XX	$\pm 0.15$ MM			
	.XXX	$\pm 0.05$ MM			
ANGULAR		$\pm 0.5$ DEG			
DRAFT ANGLE/SIDE		0.5 °MAX			
BURR & FLASH		0.10 MAX			
BREAK CORNERS		0.20 R.MAX			
PARTING LINE MISMATCH		0.05 MAX			
DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD					
APPD					
PART NO.				SL-841	REV
					B

