
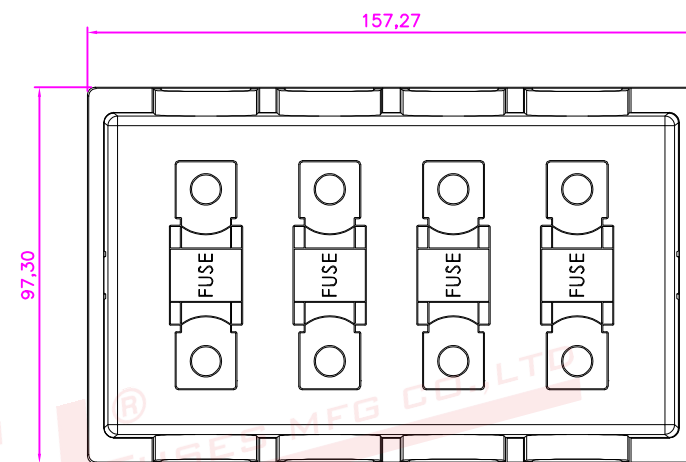


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Sellifuse


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20211110-01	ORIGINAL RELEASE		

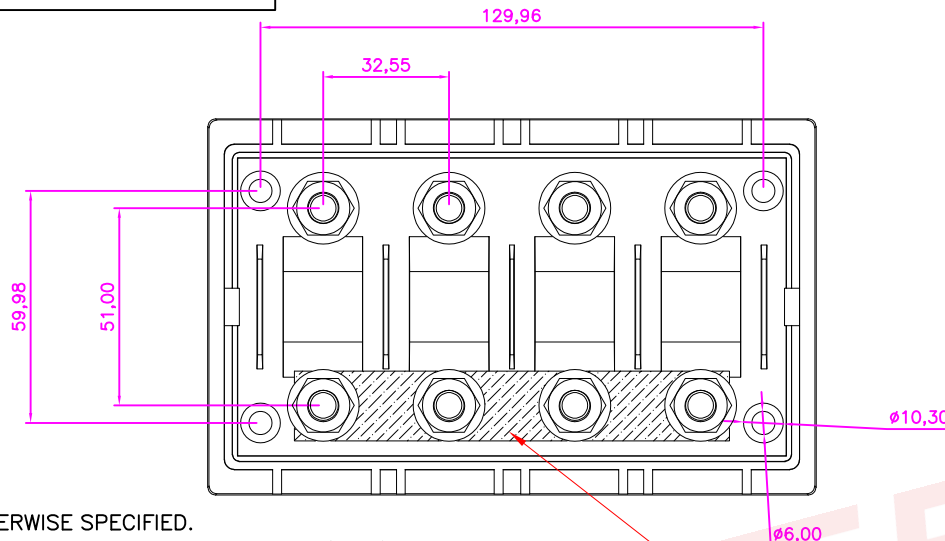

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuseholder shown are for bolt-on fuse(ANM). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- It is two-ways fuseholder ;
- Mounting torque: 5Nm
- one-way rating: DC32V300A; AC220V300A;
- Connector is default.

Copper Strip
T=1.5±0.2mm

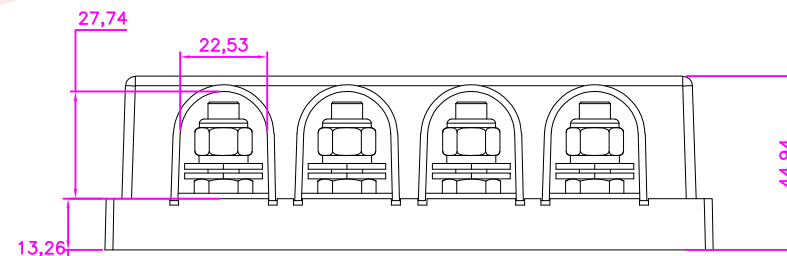

8	L-ANM -1	Connector	1	Copper	Tin plated
7	PL-ANM-1	Cover	8	PVC	Black
6	NT-ANM-1	Cover	1	PC 94-V0	transparent Blue
5	DQ-ANM	spacer M8*16	12	304 Stainless steel	Nature
4	SP-ANM	Spring M8	8	304 Stainless steel	Nature
3	NT-ANM	Nut M8	16	304 Stainless steel	Nature
2	BL-ANM	Bolt M8*30	8	304 Stainless steel	Nature
1	PB-ANM	PA BASE	1	PA+GF 94-V0	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED		Two ways Fuseholder				CUSTOMER	
WALL THICKNESS		FOR ANM bolt-on Fuse					
LINEAR	.XX	±0.15 MM					
	.XXX	±0.05 MM					
ANGULAR		±0.5 DEG					
DRAFT ANGLE/SIDE		0.5 °MAX					
BURR & FLASH		0.10 MAX					
BREAK CORNERS		0.20 R.MAX					
PARTING LINE MISMATCH		0.05 MAX					
DSGN	Tommy	10-11-21	SCALE	free			
DFTS	Tommy	10-11-21	SHEET	1 OF 1			
CHKD			PART NO.				REV
APPD			ANM-H4R				A